





SUSTAINABLE WOOD FOR GENERATIONS

FelixWood has been designing, manufacturing and marketing natural hardwood landscape solutions for 130 years. In 1891, Felix Clercx, our founder, set up a sawmill near Helmond in the Netherlands. By the second half of the 20th century, the company expanded operations and began importing exotic wood from Africa and Indonesia. This led to significant growth and the launch of the FelixWood brand in the 1990's. FelixWood has since become a global leader in high-quality, exterior hardwood products.

Today, we specialise in sustainable, certified wood products that are legally sourced. At FelixWood, we want to create reliable, high-quality products that last and respect the environment. FelixWood is strongly committed to ensuring that abundant and healthy forests remain for future generations.

In 2019, we joined Forestia group. Forestia group specialises in composite wood and eco-friendly outdoor solutions. They share the same management, conservation and ecological values and goals that we have. Together we are able to design and distribute products that are respectful of our environment and ecosystem.

DECKING

BANGKIRAI	4
AFRIKULU	8
SAMBA	10
MELODY	12
ROBINIER	14
THERMO ASH	16
THERMO PINE	18
POSTS + BEAMS	20



La marque de la gestion forestière responsable FSC* C003450



FelixWood is fully compliant with the European Union regulations for EUTR timber. A large number of our products are FSC® or PEFC certified. Products with FSC® or PEFC certification have the above logos displayed on their product pages.

FENCING

INTERLOCKING FENCING 2	!2
MODERN PANELS 2	<u>)</u> ∠
ELEGANT PANELS 2	26
CHARMING PANELS 2	27
TREILLIS 2	28
BAR FENCE 3	3(
ACCESSORIES 3	32

CLADDING

ENDURO	34
OTHER PROFILES	35
MELODY	36
SYMPHONY	38





BANGKIRAI DECKING

Bangkirai, or Yellow Balau, is a well-known type of wood from Indonesia. It is naturally very DAMAGE RESISTANTable and wear-resistant, making it ideal for outdoor applications, especially decking. It is dense and can withstand heavy use, without denting and scratching.

The majority of our Bangkirai comes from an FSC -certified forest concession in the northeast island of Borneo. The wood is checked, cut, dried and processed in accordance with FelixWood's high quality standards.

The colours of Bangkirai vary according to the wood and growing location in the forest. It come in various shades, ranging from yellow to pinkish-brown. The wood can sometimes contain "pinholes" the size of a pinhead. This property, caused by insects, is barely visible and is part of the charm of real Bangkirai wood. Pinholes have no effect on quality and do not expand.

CHARACTERISTICS

Profil P120



Profil P501



Profil P500

Profile: Smooth/Ribbed

Ref. 1476 19x90 mm (P120)

Profile: Smooth/Smooth

Ref. 2480 25x120 mm (P501) Ref. 2481 25x145 mm (P501)

Profile: Smooth/Grooved

Ref. 1600	27x190 mm (P500)
Ref. 1716	45x145 mm (P500)
Ref. 1758	45x190 mm (P500)



STABLE



DURABLE




DAMAGE RESISTANT



INSTALLATION



Fasteners available on www.cobrafastener.fr

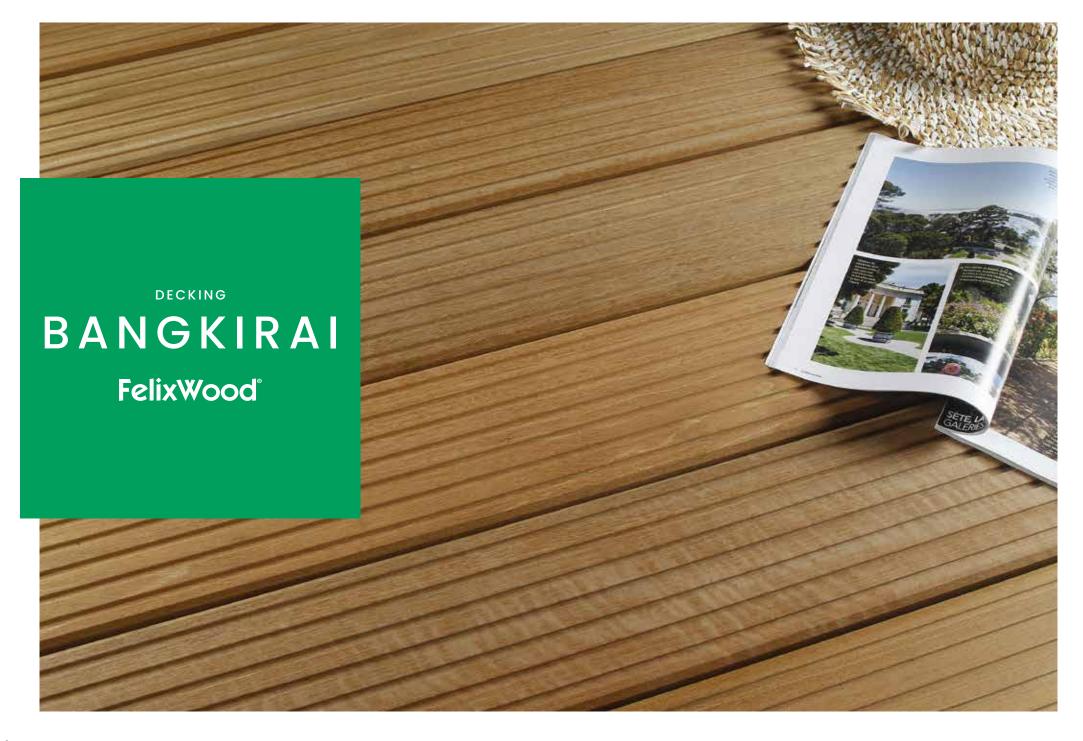




BANGKIRAI DECKING

This species is naturally very DAMAGE RESISTANTable and wear-resistant, making it ideal for outdoor wooden exteriors, especially decking. It is dense and can withstand heavy use, without denting and scratching. Our Bangkirai is artificially dried to reach a humidity of 18% +/-2%. This results in a better-quality product and limits any deformation.

The colours of Bangkirai vary according to the wood and growing location in the forest. It comes in various hues ranging from yellow to pinkish-brown. The wood can sometimes contain "pinholes" the size of a pinhead. This property, caused by insects, is barely visible and is part of the charm of real Bangkirai wood. Pinholes have no effect on quality and do not expand.

CHARACTERISTICS



Profil P110

Profile: Smooth/Grooved

Ref. 1519 21x145 mm (P100) Ref. 1805 25x145 mm (P100) Ref. 1598 27x145 mm (P100)

Profile: Ribbed/Grooved

Ref. 1573 25x145 mm (P110)



STABLE



VERY DURABLE




DAMAGE RESISTANT



INSTALLATION



Fasteners available on www.cobrafastener.fr

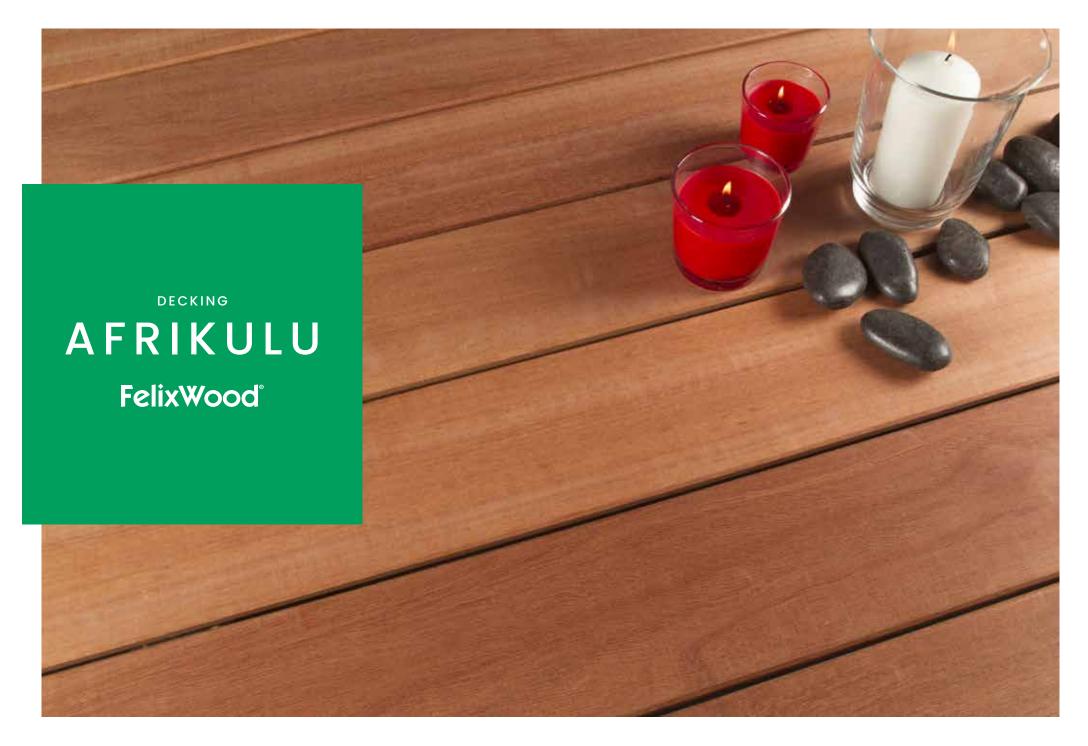




AFRIKULU DECKING

Mukulungu, renamed Afrikulu in the FelixWood range, is a tropical wood from the Congo Basin in West Africa. Afrikulu is one of the hardest and most durable hardwood species available. It is distinguished by its reddish-brown colour and dark veining, which lightens over time to a silvery-grey. Afrikulu is valued for its incredible longevity and robustness. Its compact structure, high density and shorter fiber length make it more suitable than Bangkirai for use on smooth surfaces.

Afrikulu is almost entirely knot free and always dried. Our Afrikulu deck boards are artificially dried to an average 16% humidity to increase the quality of the wood. Both our 21 and 25 mm thick planks are available with FSC® certification.

The wood is available in many variants and lengths, for screw-on or clip-in installation.

CHARACTERISTICS



Profile: Smooth/Grooved

Ref. 2117-FSC° 21x145 mm (P107) Ref. 1881-FSC° 25x145 mm (P107) Ref. 2214-FSC° 25x145 mm (P105)

Profile: Smooth/Smooth

Ref. 2116-FSC* 25x145 mm (P410) Ref. 2160-FSC* 25x145 mm (P415)

Profile: Smooth for B-Fix® Clips

Ref. 2118-FSC° 21x145 mm (P130)

INSTALLATION



Fasteners available on www.cobrafastener.fr



B-Fix Clip details on p.13



Cobra® Hybrid 8-25



STABLE




VERY DURABLE



DAMAGE RESISTANT





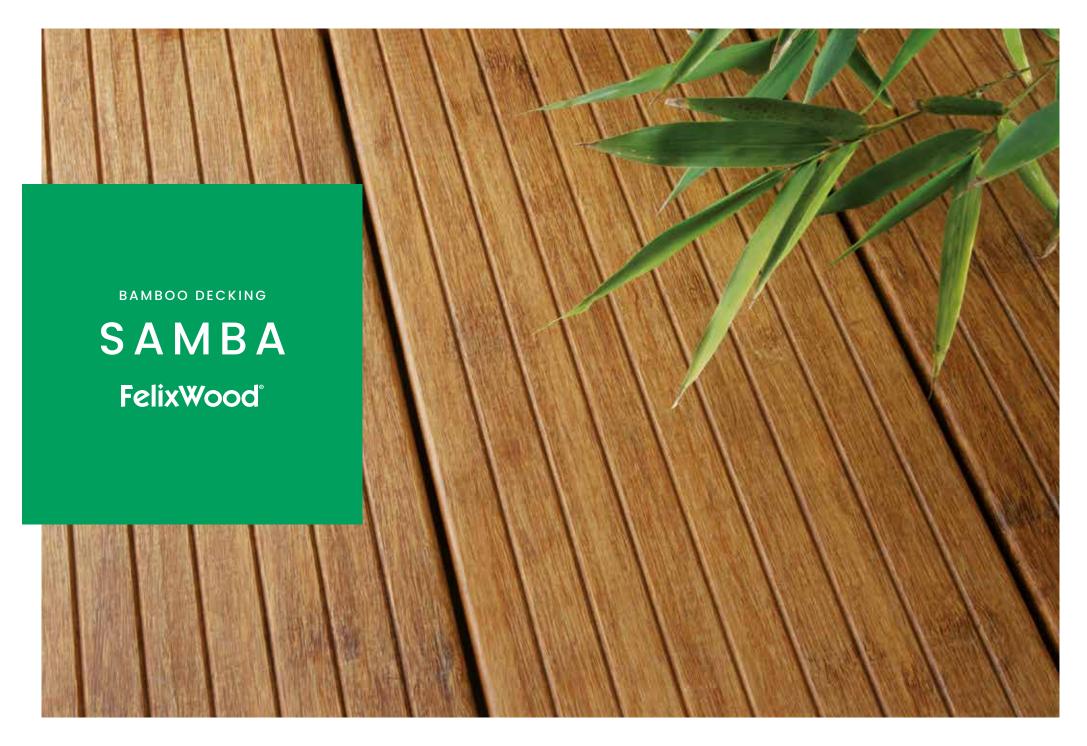



SAMBA BAMBOO DECKING

FelixWood's Samba decking is made from bamboo that has been thermally treated. This patented treatment modifies the molecular structure of the bamboo making the fibers more durable and insensitive to attacks from insects and fungi. Bamboo strands are shredded into fibers, heated at a high temperature and then coated with phenolic resin containing an antifungal agent. The thermal modification takes place at a temperature of 150 C and gives the boards a unique honey-coloured hue. The process guarantees excellent durability, hardness and stability.

Available in a matte oiled finish (water-based), Samba decking is installed using invisible Cobra® Hybrid 7-22 clips.

CHARACTERISTICS



Profile: Smooth/Grooved

Ref. 1431 2250x139x18mm

Interlocking tongue and groove





STABLE



DURABLE



DAMAGE RESISTAN



ENVIRONMENTALLY SUSTAINABLE




INSTALLATION



Cobra® Hybrid 7-22

Ref. 1334 (90 clips + screws) 1 bag for 4.5 m²

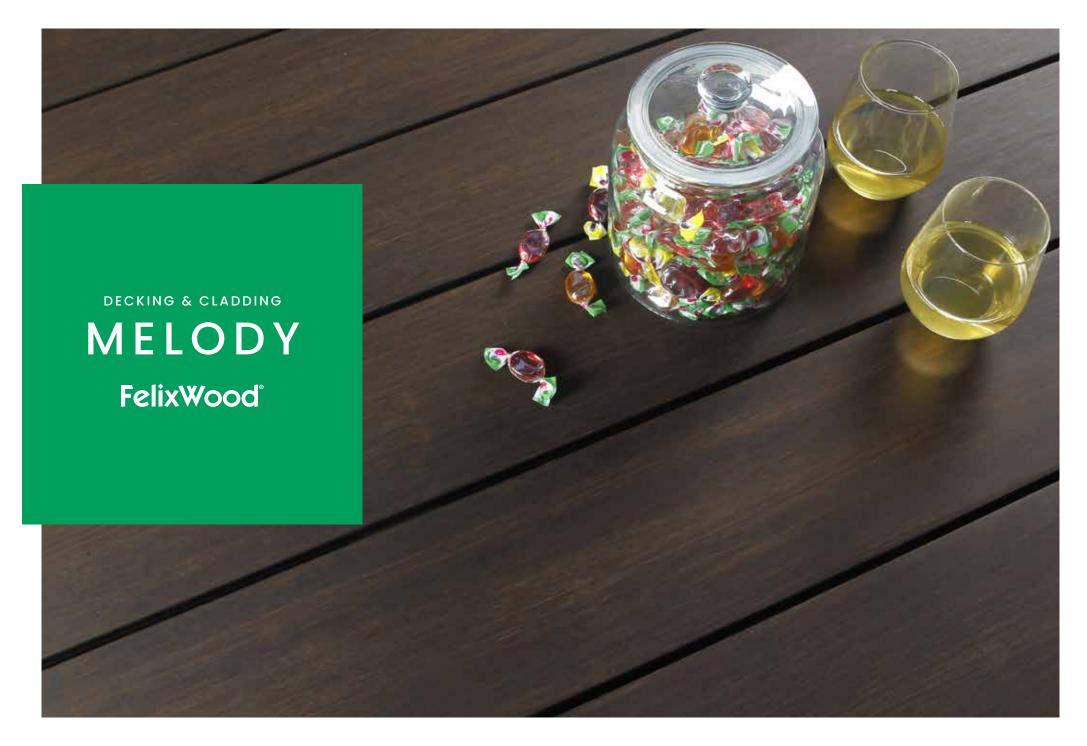




MELODY DECKING & CLADDING

FelixWood's Melody decking and cladding is available in 4 widths and is made of thermally modified bamboo. The boards are made by using heat (200° C) to change the molecular structure of the bamboo fibers before they are compressed under high density. The result is a very hard, stable and dense material. Combined with excellent durability, these properties make FelixWood heat-treated bamboo ideal for outdoor use in decking or cladding.

Cobra® Hybrid 7-22 clips are used for mounting both the facade cladding and the decking. Melody parts are available with an oiled (water-based) finish.

CHARACTERISTICS









Profile: Smooth/Grooved

Ref. 1433 1860x155x18mm

Profile: Smooth/Grooved

Ref. 1322 1860x139x18mm

Profile: Smooth/Grooved Ref. 1323 1860x103x18mm

Profile: Smooth/Grooved
Ref. 1324 1860x70x18mm



STABLE



DURABLE



DAMAGE RESISTANT



ENVIRONMENTALLY SUSTAINABLE



INSTALLATION



Cobra® Hybrid 7-22

Ref. 1334 (90 clips + screws) 1 bag for 4.5 m²





ROBINIER DECKING

Robinia or "pseudo-Acacia" is the most durable European wood, without thermal or chemical treatment. For outdoor applications such as decking, Robinia is the best alternative to tropical hardwood. Our Robinia comes from Hungarian forests, where the grain is straighter and there is an abundant supply. Robinia represents 20% of the local forest area in Hungary, compared to 1% in Germany and France.

Like Chestnut and Oak, Robinia has a straight grain and a warm yellow to greenish-yellow hue, but it is much more durable. It is also naturally resistant to rot. As the wood ages, the colour changes from a warm golden-brown to a silvery-grey.

CHARACTERISTICS

Profil P417



Profile: Smooth/Smooth

Ref. 2243 22x120 mm (P417)

Profile: Smooth/Smooth

Ref. xxxx xxcm seta amet dolore amet fit



STABLE



VERY DURABLE



DAMAGE RESISTANT



INSTALLATION



Fasteners available on www.cobrafastener.fr



Cobra® Hybrid 8-25



To increase stability, the boards are created using wood sections ranging from 30 cm to 1 m that are joined together.





THERMO-ASH DECKING

Our Thermo-Ash comes from North American (USA-Canada) forests. The American Ash is larger than the European variant and has a long branch-free trunk, making the decking virtually free of "natural defects," such as knots and tassels. With its knot-free quality and golden brown tones, this board looks like tropical hardwood and is a great alternative choice.

Since Ash wood is not naturally durable, the Ash from the FelixWood range has been thermally treated to increase durability and stability. Thermal treatment is a controlled process that uses heat to naturally protect the wood and increase its strength, without the use of chemicals. The wood becomes resistant to moisture, minimizing its ability to shrink and swell. The thermal treatment also makes the wood insensitive to attacks by insects and fungi.

Due to its high durability (Class 1), low heat conductivity and easy processing, our Thermo-Ash is a great decking option. The boards are smooth on one side, with grooved edges to allow for invisible fastening, and are available in lengths up to 3.60 m.

CHARACTERISTICS



Profil P137



Profil P418

Profile: Asymmetrical Smooth

Ref. 1507 21x130 mm (P137), KD6%

Joist

Ref. 1629 42x65 mm (P418), glulam



STABLE



VERY DURABLE



ENVIRONMENTALLY FRIENDLY



INSTALLATION



Nova-Clip

Ref. 2466 Nova-21: Clip, 50 screws (4.5 x 30 mm) included





THERMO-PINE DECKING

Thermo-Pine is one of the most environmentally friendly decking options in our range. The environmental impact of Thermo-Pine is minimal, since it originates from well-managed European forests and is preserved in an environmentally friendly way.

Since pine is a species that is not naturally suited to outdoor use, our boards are all heat treated. Thermal treatment is a controlled process that modifies the wood to substantially increase its durability and stability, without using chemicals. After treatment, the decking takes on a warm caramel colour that will turn to a silvery-grey over time. The boards are remarkably soft to touch and conduct heat very well.

The decking can be installed using a concealed clip system. The boards can be screwed or clicked on using the Cobra Hybrid clips. With correct installation and maintenance, you can enjoy your Thermo-Pine deck for many years to come.

CHARACTERISTICS

Profil P141	
Profil P410	
Profil P136	

Profile: Grooved

Ref. 2549 26x115 mm, (P141), PEFC

Profile: Smooth/Smooth

Ref. 2550 26x139 mm, (P410), PEFC

Profile for installation with Cobra® Clips

Ref. 2511 26x139 mm, (P136), PEFC

Joist

Ref. 2548 42x65 mm, (P410), PEFC





DURABLE



ENVIRONMENTALLY FRIENDLY





INSTALLATION



Profil P410

Fasteners and clips available on www.cobrafastener.fr

DECKING & FENCING

POSTS AND BEAMS FelixWood®









STRUCTURAL WOOD



Profil P418



Profil P419



Profil P500 Premium

Profile: Smooth/Smooth

Ref. 2156	Bangkirai 40x60 mm (P418), KD12%, glulam
Ref. 2375	Red Balau 40x60 mm (P418), KD12%, glulam
Ref. 2376	Red Balau 42x68 mm (P418), KD12%, glulam

Profile: Smooth/Striated

Ref. 1622 **Merbau** 40x60 mm, (P419), KD12%, glulam

Profile: Smooth/V-Groove

Ref. 2425 **Bangkirai** 42x65 mm, (P500P), KD18% Ref. 2423 **Bangkirai** 45x90 mm, (P500P)

Glued laminated joists are generally not suitable for load-bearing structures and must be protected using Bitudeck bituminous strips.



POSTS



Profil P510



Profil P510 Premium

Profile: Deep V-grooves

Ref. 2037	Okan 65x65 mm, (P510), I pointed end
Ref. 2138	Okan 65x65 mm, FSC®, (P510), 1 pointed end
Ref. 2038	Okan 85x85 mm, (P510), 1 pointed end
Ref. 2139	Okan 85x85 mm, FSC®, (P510), 1 pointed end

Profile Fine V-grooves

Ref. 1660	Bangkirai 68x68 mm, (P510P)
Ref. 1674	Bangkirai 90x90 mm, (P510P)
Ref. 2478	Bangkirai 120x120 mm, (P510P)



CONSTRUCTION

Profil P410	
Profil P520	

Profile: Smooth/Smooth

Ref. 1473 **Bangkirai** 18x95 mm, (P410)

Profile: V-grooves

Ref. 1469 **Bangkirai** 16x145 mm, (P520) Ref. 1470 **Keruing** 16x145 mm, (P520)

INTERLOCKING FENCE

FelixWood®





1 CHOOSE A FILLER BOARD




3 CREATE YOUR OWN COMBINATION



MyFence Planner
Using our online fence
configurator
fr.myfenceplanner.com

2 CHOOSE A TRELLIS DESIGN









Trellis Info p.28






INTERLOCKING FENCE*

Using 3 components you can easily and quickly create a beautiful and natural fence.


The different filler profiles make it possible to play with the design and look great when combined with a trellis. There are a multitude of customizations available. Installation can be done using Bangkira poles or on aluminum poles for a more modern look.

COMPONENTS









Profiles

Bangkrai BAROK, 21x145 mm, (P230), L 180 cm Ref. 1525 Bangkrai CLASSIK, 21x145 mm, (P210), L 180 cm Ref. 1524

Ref. 1350 Bangkirai, Profil U, 35x45 mm, L 200 cm Bangkirai, Couvertine, 40x45 mm, L 183 cm Ref. 1348

Garden Gates

A. Ref. 1323 Bangkirai, Door 22, 100x180 cm - left opening B. Ref. 1322 Bangkirai, Door 22, 100x180 cm - right opening

Doors include lock and stopper.

Posts, hardware and installation accessories p.33





^{*}Product only available by pallet. No retail order possible.





MODERN FENCE PANELS

Felixwood Modern garden panels are made of thin, sturdy, Keruing FSC slats and are available in 4 models. Each panel is offered in the same 180x180 cm format, but the width and the shape of the slats (rectangular or rhombus) vary depending on the model. For example, panels 51 and 52 are made with rhombus shaped slats that are spaced 5mm apart. This profile allows air to pass through, while preserving privacy.

The Modern panel range has a contemporary style and comes with post covers that create a continuous slatted wall effect. These sleek and modern garden panels are ideal for delineating a backyard space and provide privacy from neighbours. A matching gate, including hardware, is available for every FelixWood model.

PANELS & DOORS

















Panel 50 - Slats 15x70mm

A. Ref. 2283 Keruing, FSC®, Panneau 50, 180x180 cm **B.** Ref. 2249 Keruing, FSC®, Porte 25, 100x180 cm

Panel 51 - Rhombus slats 13x65mm

C. Ref. 2284 Keruing, FSC®, Panneau 51, 180x180 cm **D.** Ref. 2250 Keruing, FSC®, Porte 26, 100x180 cm

Panel 52 - Rhombus slats 13x44/65/90mm

E. Ref. 2285 Keruing, FSC®, Panneau 52, 180x180 cm **F.** Ref. 2251 Keruing, FSC®, Porte 27, 100x180 cm

Panel 53 - Slats 13x 30/90mm

G. Ref. 2494 Keruing, FSC®, Panneau 53, 180x180 cm

Panel 60

X. Ref. XXXX Set amet filum

Doors include lock and stopper.

Posts, hardware and installation accessories p.33



FENCING

ELEGANT PANELS

FelixWood®



PANELS & DOORS













The Elegant panel consists of a wooden 42x42mm section frame with horizontal wooden slats. **It is available in three widths: 180, 120 et 90 cm.** These high-quality panels are made using FSC®-certified Keruing. This exotic hardwood is extremely durable and is ideal for outdoor use.

Elegant panels

A. Ref. 2282 Keruing, FSC®, Panel 33, 90x180 cm

B. Ref. 2298 Keruing, FSC®, Door 14, 100x180 cm

C. Ref. 2276 Keruing, FSC®, Panel 6, 180x180 cm

D. Ref. 2279 Keruing, FSC®, Panel 13, 120x180 cm

E. Ref. 2277 Keruing, FSC®, Panel 10 , 180x180 cm

Doors include lock and stopper.

Posts, hardware and installation accessories p.33





FENCING

CHARMING PANELS

FelixWood®

PANELS & DOORS











Fences play both a practical and decorative role. They add visual interest, can be used to delineate a property or garden space and provide privacy from neighbours. The Charming panel offers a traditional style with great privacy. The panel is frameless with wide, vertical slats (13x145mm) made from FSC®-certified Keruing. It also has blackout slats to give you the privacy that you crave.

Charming Panels

A. Ref. 2097 Keruing, Panel 15 (1/3 V-Nut), 180x180 cm

B. Ref. 2299 Keruing, FSC®, Door 20, 100x180 cm

C. Ref. 2280 Keruing, FSC®, Panel 15, 180x180 cm

D. Ref. 2297 Keruing, FSC®, Cover,, 45x70 mm, L 180 cm

Doors include lock and stopper.

Posts, hardware and installation accessories p.33




TRELLISES

FelixWood®



TRELLISES





FelixWood trellises are made of thin slats that are mounted together and reinforced on an FSC®-certified Keruing frame. The Chantilly trellis is a semi-open screen that provides some privacy, while allowing light to pass through. Available in 2 sizes, this trellis is perfect for climbing plants or delineating a garden or deck space.


CHANTILLY Trellis

A. Ref. 2290 Keruing, FSC®, Mesh 17, 180x180 cm

B. Ref. 2289 Keruing, FSC®, Mesh 18, 90x180 cm

Frame 42x42 mm, Slats 10x40 mm



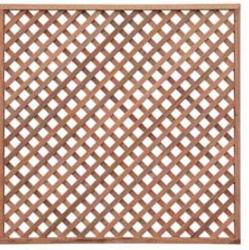


+ LEARN MORE AT FELIXWOOD.FR

Posts, hardware and installation accessories p.33

TRELLISES









CHINON Trellis

A. Ref. 2292 Keruing, FSC®, Mesh 24, 180x180 cm **B.** Ref. 2293 Keruing, FSC®, Mesh 23, 90x180 cm

Frame 25x25 mm, Slats 8x25 mm

CHAMBORD Trellis

C. Ref. 2374 Keruing, FSC®, Mesh 21, 180x180 cm **D.** Ref. 2373 Keruing, FSC®, Mesh 22, 90x180 cm

Frame and slats 25x25 mm, half-timber assembly



BLACKOUT TRELLISES









LOUVRE Trellis

E. Ref. 2294 Keruing, FSC®, Mesh 26, 180x180 cm **F.** Ref. 2293 Keruing, FSC®, Mesh 25, 90x180 cm

Frame 40x40 mm, Inclined slats 12x54 mm

VILLANDRY Adjustable Blind Trellis

G. Ref. 2287 Keruing, FSC®, Mesh 28, 180x180 cm **H.** Ref. 2286 Keruing, FSC®, Mesh 27, 90x180 cm

Frame 25x25 mm, Articulated slats 8x25 mm





+ LEARN MORE AT FELIXWOOD.FR

Posts, hardware and installation accessories p.33





BAR FENCING

Bar fencing allows you to delineate a perimeter or create structured spaces. Adding gates makes it easy to pass through and connect different spaces. This fence is designed to suit all tastes and to elevate the look of any outdoor space.

BAR FENCE





Clôture à barreaux


A. Ref. 2295 Keruing, FSC®, Fence 21, 90x180 cm **B.** Ref. 2296 Keruing, FSC®, Fence 22, 110x180 cm

C. Ref. 2300 Keruing, FSC®, Fence 11, 90x100 cm

D. Ref. 1015 Stainless steel fence fitting

Posts, hardware and installation accessories p.33



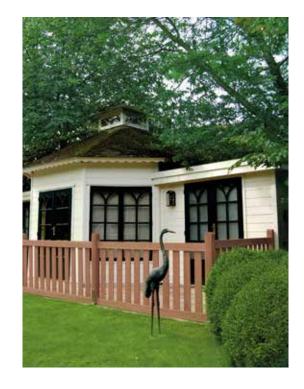







DECKING & FENCING

FENCE OPTIONS

FelixWood®



A perfect match.

Every deck or fence project deserves strong, long lasting materials that can be relied on. To build the perfect deck or fence you need good quality wood and the right installation accessories.

This is why you need the Cobrafastener range. By using quality accessories, assembly is simple, fast and guaranteed to last.

Further information available in the Cobrafastener® catalog.





FENCE ACCESSORIES -



















A. Ref. 1357	Round head post , Bangkirai, V-groove, 90x90 mm, L 190 cm
B. Ref. 1359	Diamond head post, Bangkirai, V-groove, 90x90 mm, L 190 cm
C. Ref. 1025	Diamond head 11, stainless steel, for post 90x90 mm
D. Ref. 1027	H-bracket , stainless steel, for post 90x90 cm
E. Ref. 1028	U-bracket , stainless steel, for post 90x90 cm
F. Ref. 1029	Jappy bolt, stainless steel, M10x110 mm
G. Ref. 1022	Fixing brackets, stainless steel, 4 pcs
Ref. 1024	Fixing brackets, stainless steel, per unit - 0,92 €/pcs
H. Ref. 1017	Fitting 06, for all doors
I. Ref. 1009	Screw 5x50 mm, stainless steel, TORX, 100 pcs

MAINTENANCE -













Options

A. Ref. 1073 Oil for Bangkirai/Mukulungu, 2.5 LitersB. Ref. 1076 Brightener, 1 Liter

Ref. 1010 Screw 5x60 mm, stainless steel, TORX, 100 pcs

C. Ref. 1077 Cut treatment 250 ml
Ref. 1938 Cut treatment 750 ml

ENDURO

FelixWood[®]




ENDURO / ENDURO B



В. -

c. _______



Enduro cladding is made of thermo-treated pine. Thermo-heated wood is chemical free. It does not rot and contains no preservatives. Thanks to its low water absorption, Thermo-heated wood lasts longer than ordinary wood and retains its durability in all weather conditions. The wood is sourced from renewable, sustainably managed forests and is recyclable. Enduro cladding can be installed horizontally or vertically. verticale, de façon structurée ou déstructurée, plus moderne.

Enduro

A. Ref. 2498 **Enduro S**, 26x139 mm, PEFC, KD8%

B. Ref. 2505 **Enduro D**, 26x139 mm, PEFC, KD8%

C. Ref. 2506 **Enduro T**, 26x139 mm, PEFC, KD8%

ENDURO B

D. Ref. 2508 ENDURO BS, 42x139 mm, PEFC, KD8%
 E. Ref. 2509 ENDURO BD, 42x139 mm, PEFC, KD8%
 F. Ref. 2507 ENDURO BT, 42x139 mm, PEFC, KD8%



STABLE



DURABLE





Remember to follow the installation rules and regulations when installing cladding.



CLADDING

OTHER PROFILES

FelixWood[®]

OTHER PROFILES

Α.



Thermo-Pine profile

A. Ref. 2551 **ROMBO15**, 26x65 mm, PEFC, KD8%

Thermo-Ash Profile

B. Ref. 1503 Rhombus, 21x65 mm, PRIME, KD6%



VERY STABLE




VERY DURABLE





Remember to follow the installation rules and regulations when installing cladding.

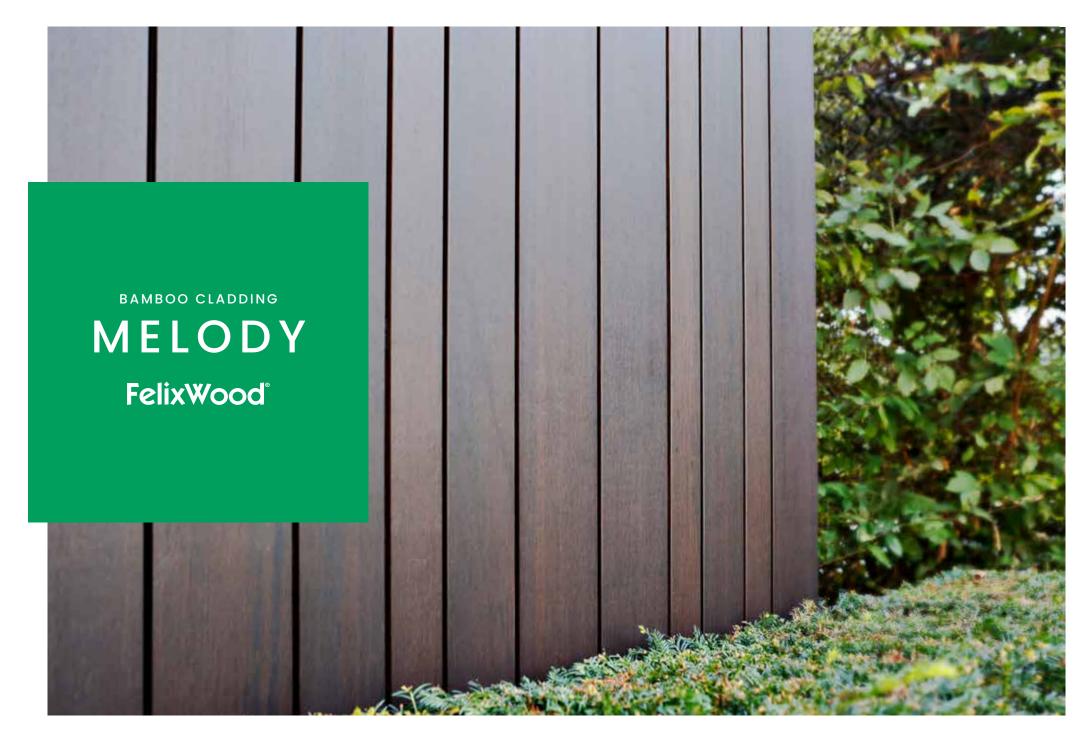




MELODY BAMBOO CLADDING

FelixWood's Melody cladding is available in 4 widths and is made of thermally modified bamboo. The cladding is produced by heating bamboo fibers to very high temperatures (200 C), in order to make them impervious to mold, and then pressing them together. The treatment creates a very stable and durable material that is ideal for outdoor use in decking or cladding. The 4 profiles can be mixed together to create a more rhythmic and playful facade. The vertical installation and the use of various widths ensure a modern and dynamic appearance.

Deck and cladding installation can be done using Cobra® Hybrid 7-22 invisible clips Melody cladding is available with an oiled (water-based) finish.

CHARACTERISTICS









Profile: Smooth/Grooved

Ref. 1433 1860x155x18mm

Profile: Smooth/Grooved

Ref. 1322 1860x139x18mm

Profile: Smooth/Grooved Ref. 1323 1860x103x18mm

Profile: Smooth/Grooved Ref. 1324 1860x70x18mm



STABLE



VERY DURABLE



DAMAGE RESISTAN



ENVIRONMENTALLY SUSTAINABLE





INSTALLATION



Cobra® Hybrid 7-22

Ref. 1334 (90 clips + screws) 1 bag for 4.5 m²

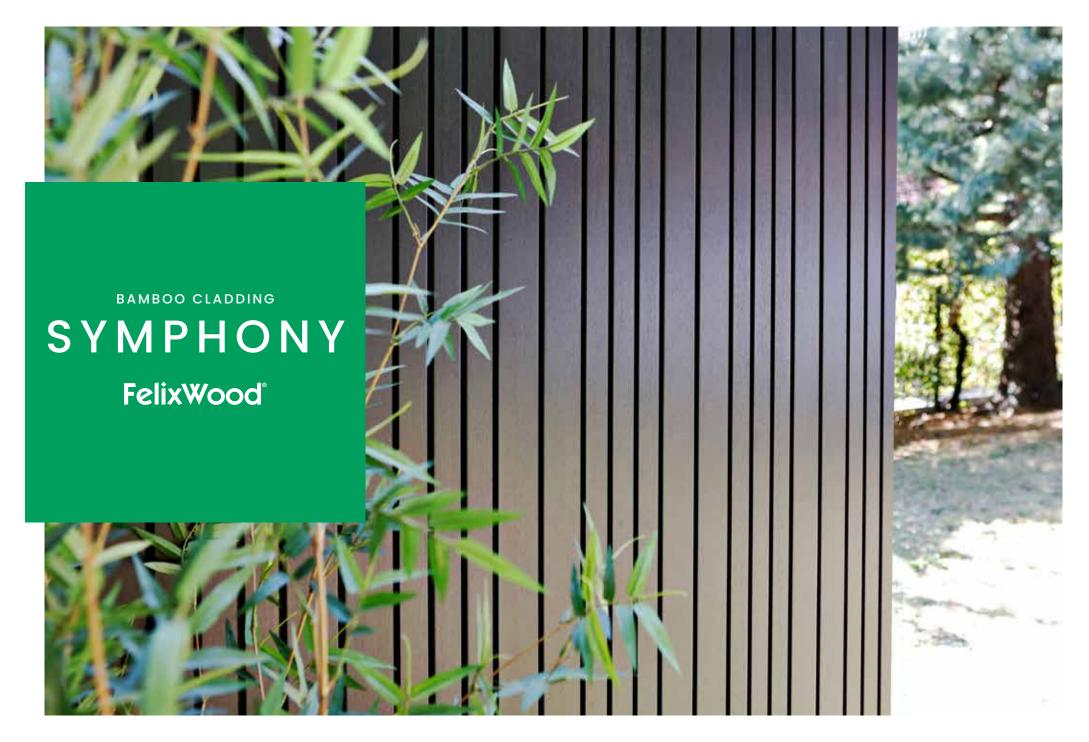

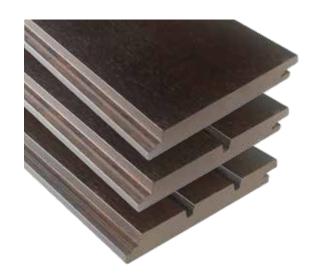

SYMPHONY BAMBOO CLADDING

Symphony cladding is very unique because it offers a wide variety of combinations for customizing your facade. Its 3 compatible profiles allow for different horizontal and vertical installations. The panels can be installed regularly, using panels with the same widths, or rhythmically, using panels of varying widths. Using interlocking panels of varying widths creates a unique and custom look.

The cladding is produced by heating bamboo fibers to a very high temperature (200 C), in order to make them insensitive to mold and fungi. The thermo-treated bamboo fibers are then pressed together and combined with a phenolic resin. The result is a particularly stable and durable material, perfectly suited for use in outdoor applications, such as facade cladding. SYMPHONY planks are offered with a matte oiled finish. They are mounted using completely invisible stainless steel clips.

CHARACTERISTICS







Profile: Grooved

Ref. 1326 Symphony 40, 1860x139x18mm

Profile: Grooved

Ref. 1327 Symphony 60, 1860x139x18mm

Profile: Smooth

Ref. 1328 Symphony 130, 1860x139x18mm



STABLE



DURABLE



ESISTANT



ENVIRONMENTALLY SUSTAINABLE



FIXATION



Clip SYMPHONY

Ref. 1361 (100 clips + screws) 1 bag for 7.5 m²



felixwood.fr